


Overview

A linear power supply used to supply power to remote products at 13.8 Volts DC. Enclosed in a metal box with room for a 6.5AH battery & tamper features, the enclosure can be mounted directly over a standard twin GPO outlet.

The TS0073 comes with a 1 metre long, 3-pin, main cord & onboard battery charging facilities. Output current is regulated & an internal fuse protects the battery from excessive loads.

Features

- Backup Battery
- Built-in tamper
- Wall mount enclosure
- Mounted directly over a GPO to protect power from being switched off

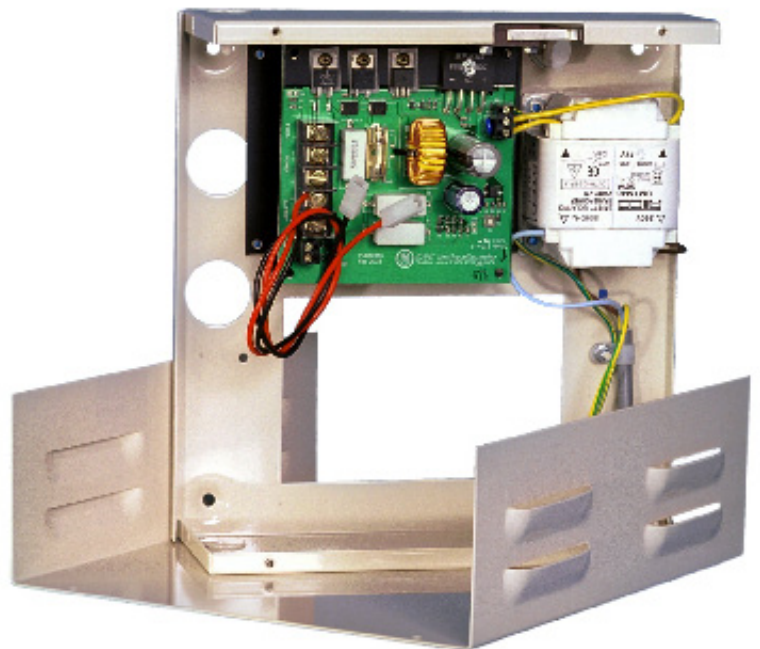

TS0073

2AMP Power Supply and
Battery Box



Australian Distributor Direct Alarm Supplies

NSW
Head Office
Riverwood
Ph: (02) 9717 5222
Service: 1800 252 213

Chatswood
Ph: (02) 8467 1467

Granville
Ph: (02) 9897 7722

Rosebery
Ph: (02) 9698 9698

ACT
Fyshwick
Ph: (02) 6280 9630

QLD
Ph: (07) 3252 5512

Ashmore
Ph: (07) 5597 7203

SA
Torrensville
Ph: (08) 8150 9400

WA
Ph: (08) 9241 3100

VIC
Coburg
Ph: (03) 9383 2066

Rowville
Ph: (03) 9755 6922

TAS
Hobart
Ph: (03) 6272 0211

New Zealand Distributor Hills Electronic Security

Auckland
Ph: (09) 525 8007

Christchurch
Ph: (03) 374 6277

Wellington
Ph: (04) 939 9355

GE Security
Australia & New Zealand
T +61 3 9239 1200
F +61 3 9239 1299

Specifications

Mains Input	
Input Voltage	240 Volts AC Mains
Input Current Standby	70mA AC @ 240 Volts
At Maximum O/P	230mA AC @ 240 Volts
Power Supply Outputs	
O/P Voltage	13.8 Volts DC
O/P Current	2 Amps maximum
Battery Charge O/P	13.8 Volts DC
Battery Capacity	1 X 6.5 Amp Hr maximum
Monitoring Outputs	
'Mains OK' O/P	Open Collector 'Mains OK' Output. (Active Low when Mains present. 50mA max.)
'Mains OK' Indication	'Mains OK' LED on PCB

Ordering Information

TS0073	12V DC Power Supply & Battery Box
--------	-----------------------------------

