

## Overview

The TS0870 series of Smart Card Readers provide secure authentication of users to the Challenger system for intrusion detection and access control.

Unprogrammed smart cards can be used in the default unsecured mode in an IUM Challenger system. In secured mode, a Smart Card Programmer and a special password protects against unauthorised use. Secured mode provides over 268 million combinations of passwords (4 billion passwords if the special high-security option for the Smart Card Programmer is used).

Challenger Smart Card Readers can be connected directly to the Challenger panel via the RS-485 LAN for simple door control, or via an Intelligent Access Controller for comprehensive access control functionality.

Challenger Smart Card Readers can be used to operate devices such as photocopiers, drinks dispensers, or lighting, in exchange for programmable user credits.

## Features

- Indoor and heavy duty models available
- Program LEDs for different functions
- High security 4-byte security code and read/write encryption
- Pay-per-use application
- Can accommodate up to 11,466 site codes and up to 65,535 user numbers
- Can be used to automatically arm and disarm areas, as well as to unlock doors
- Can be used as a Wiegand reader when connected to a Wiegand or magnetic stripe interface
- Built-in optical tamper switch

# TS0870 Series

## Smart Card Readers



# GE Security

Australian Distributor  
Direct Alarm Supplies

NSW  
Head Office  
Riverwood  
Ph: (02) 9717 5222  
Service: 1800 252 213

Chatswood  
Ph: (02) 8467 1467

Granville  
Ph: (02) 9897 7722

Rosebery  
Ph: (02) 9698 9698

ACT  
Fyshwick  
Ph: (02) 6280 9630

QLD  
Ph: (07) 3252 5512

Ashmore  
Ph: (07) 5597 7203

SA  
Torrensville  
Ph: (08) 8150 9400

WA  
Ph: (08) 9241 3100

VIC  
Coburg  
Ph: (03) 9383 2066

Rowville  
Ph: (03) 9755 6922

TAS  
Hobart  
Ph: (03) 6272 0211

New Zealand Distributor  
Hills Electronic Security


Auckland  
Ph: (09) 525 8007

Christchurch  
Ph: (03) 374 6277

Wellington  
Ph: (04) 939 9355

GE Security  
Australia & New Zealand  
T +61 3 9239 1200  
F +61 3 9239 1299

## System Block Diagram

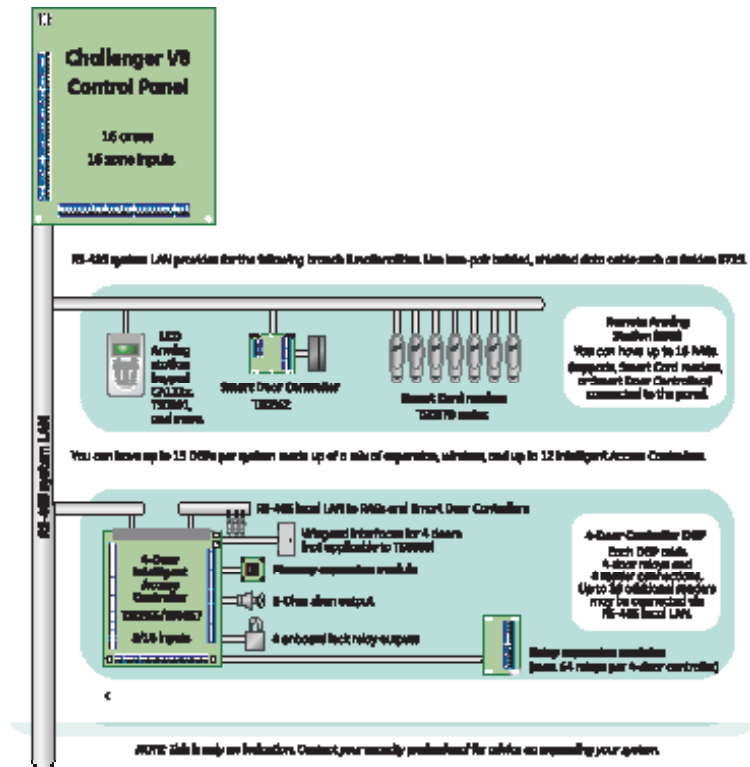

## Specifications

<b>Electrical</b>	
Supply Voltage	9 to 14 DC
Current consumption	25mA in standby; 80 mA during card read
Open collector output	1 (50 mA @ 14 VDC)
<b>Features</b>	
Addressing	The address of a new reader on the LAN may be configured from an LCD keypad or by using a reader configuration card
Request-to-exit input	Yes
<b>Physical</b>	
Maximum cabling distance	1,500 m (unless extended by LAN Isolation Interfaces)
Colour	TS0870: 5 colours available TS0870H: Dark grey TS0870D: 6 colours available
Dimensions with cover (W x H x D)	TS0870 — 36 x 110 x 20 mm TS0870H — 42 x 150 x 16 mm TS0870D — 74 x 115 x 13 mm
<b>Environmental</b>	
Operating temperature	-35 to 66°C
IP Rating	IP54
Max. humidity	95% non-condensing
<b>Regulatory Compliance</b>	
	ACMA C-Tick for Australia and New Zealand

## Ordering Information

ATS1481	Reader Configuration Card
TS1173	Smart Fob
TS1174	Smart Card with additional magnetic stripe functionality
TS1175	Smart Card, clam shell style, low cost
TS0870P	Smart Card Programmer
TS0870	Smart Card Proximity Reader.*
TS0870D	Smart Card Proximity Reader - Deco Plate.**
TS0870H	Smart Card Proximity Reader for industrial situations
TS0870W	Wall Box Mounting Kit

\* For additional colour covers add "-CO" and colour: BEI = Beige, BLK = Black, GRY = Grey, RED = Red, WHT = White (for example, order "TS0870-COBEI" for a TS0870 with a beige dress cover).  
\*\* For additional colour covers add "-CO" and colour: GRY = Grey, WHT = white, BLK = Black, BRN = Brown, CRM = Cream, DSD = Desert Sand (for example, order "TS0870D-COGRY" for a TS0870D with a grey dress cover).

